

## MIFARE Classic + Prox card - 350 / 355 / 1431 / 1441 / 1437 / 1447

Encompasses the industry's broadest range of open standard contactless smart card products. Provides the memory structure and capacity to store multiple applications on a single credential with the addition of Proximity technology for easier migration. All MIFARE Classic + Prox cards can be ordered with or without SIO encoding.

Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.

### MIFARE Classic + Prox card with SIO encoding (Recommended)

- 3500 (1K) Standard PVC
- 3506 (4K) Standard PVC
- 3550 (1K) Composite 40% Polyester/PVC\*
- 3556 (4K) Composite 40% Polyester/PVC\*

#### Programming (Select one option)

- P - Programmed with Security Identity Object (SIO) for MIFARE
- R - Both interfaces programmed (MIFARE with Security Identity Object (SIO), Prox programmed with HID format)
- V - Unprogrammed SIO, for use with iCLASS SE Encoder, Prox un-programmed

### MIFARE Classic + Prox card without SIO encoding

- 1431 (1K) Standard PVC
- 1441 (4K) Standard PVC
- 1437 (1K) Composite 40% Polyester / PVC\*
- 1447 (4K) Composite 40% Polyester / PVC\*

#### Programming (Select one option)

- L - Programmed, (125 kHz only with HID Format)<sup>6</sup>. Specify Programming Information.
- M - Programmed, HID MIFARE <sup>6</sup> (Specify HID format, for example H10301).
- B - Programmed, (125kHz and 13.56 MHz with HID Format)<sup>6</sup>. Specify Programming Information.
- N - Non-Programmed (125 kHz & 13.56 MHz without HID Format)<sup>6</sup>. Programming Information Not Required.
- S - Custom Programmed, (13.56 MHz only)<sup>6</sup>, Prox configured. Specify Programming Information

#### Front Packaging (Select one option)

- G - Plain White with Gloss Finish
- C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number<sup>1</sup>

#### Back Packaging (Select one option)

- G - Plain White with Gloss Finish<sup>2</sup>
- 1 - Plain White with Gloss Finish with Magnetic Stripe<sup>2</sup>
- C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number<sup>1, 2</sup>
- 3 - Custom Artwork with Gloss Finish with Magnetic Stripe - Specify Custom Artwork Number<sup>1, 2</sup>

#### 13.56 MHz MIFARE Card Numbering<sup>3</sup> (Select one option)

- M - Sequential Matching Encoded/Printed (Inkjetted)<sup>5</sup>
- N - No Printed Card Numbering
- U - UID (CSN) HEX card numbering only (Inkjetted)<sup>5</sup>
- V - UID (CSN) Decimal card numbering only (Inkjetted)<sup>5</sup>
- S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)<sup>5</sup>
- R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)<sup>5</sup>
- A - Sequential Matching Encoded/Printed (Laser Engraved)<sup>4</sup>
- B - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)<sup>4</sup>
- C - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)<sup>4</sup>
- Z - Reversed UID (CSN) Decimal card numbering only (Laser Engraved)<sup>4</sup>

#### Slot Punch (Select one option)

- N - No slot punch. This card can be slotted vertically, Printed Vertical Slot Indicators
- V - Vertical Slot Punch

#### 125 kHz Proximity Card Numbering<sup>3</sup> (Select one option)


- M - Sequential Matching Encoded/Printed (Inkjetted)
- N - No Printed Card Numbering
- S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)
- R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)
- A - Sequential Matching Encoded/Printed (Engraved)<sup>4</sup>
- B - Sequential Encoded/Sequential Non-Matching Printed (Engraved)<sup>4</sup>
- C - Random Encoded/Non-Matching Sequential Printed (Engraved)<sup>4</sup>

#### Option - Custom Artwork<sup>1</sup>

- \_\_\_\_\_ (Specify Artwork Number - Refer to the Custom Artwork forms for new artwork)

Enter your final card options from check boxes above. Example: 3506PGGMNS

Final Part Number						N			-	(Options #)
-------------------	--	--	--	--	--	---	--	--	---	-------------

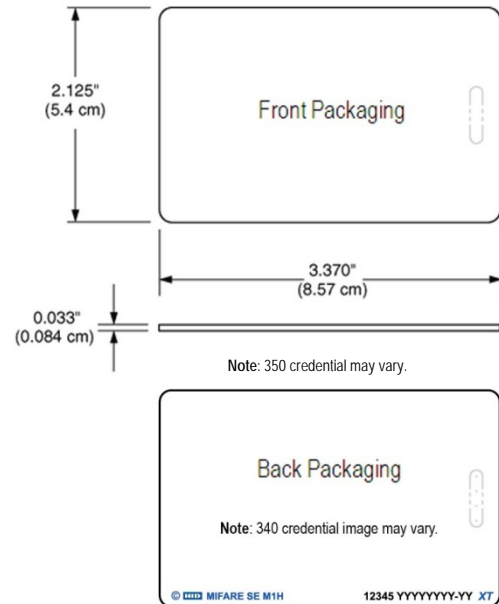

#### 13.56 MHz Card Programming Information