

MIFARE Classic + Prox card - 350 / 355 / 1431 / 1441 / 1437 / 1447

Encompasses the industry's broadest range of open standard contactless smart card products. Provides the memory structure and capacity to store multiple applications on a single credential with the addition of Proximity technology for easier migration. All MIFARE Classic + Prox cards can be ordered with or without SIO encoding.

Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.

MIFARE Classic + Prox card with SIO encoding (Recommended)

- 3500 (1K) Standard PVC
- 3506 (4K) Standard PVC
- 3550 (1K) Composite 40% Polyester/PVC*
- 3556 (4K) Composite 40% Polyester/PVC*

Programming (Select one option)

- P - Programmed with Security Identity Object (SIO) for MIFARE
- R - Both interfaces programmed (MIFARE with Security Identity Object (SIO), Prox programmed with HID format)
- V - Unprogrammed SIO, for use with iCLASS SE Encoder, Prox un-programmed

MIFARE Classic + Prox card without SIO encoding

- 1431 (1K) Standard PVC
- 1441 (4K) Standard PVC
- 1437 (1K) Composite 40% Polyester / PVC*
- 1447 (4K) Composite 40% Polyester / PVC*

Programming (Select one option)

- L - Programmed, (125 kHz only with HID Format)⁶. Specify Programming Information.
- M - Programmed, HID MIFARE ⁶ (Specify HID format, for example H10301).
- B - Programmed, (125kHz and 13.56 MHz with HID Format)⁶. Specify Programming Information.
- N - Non-Programmed (125 kHz & 13.56 MHz without HID Format)⁶. Programming Information Not Required.
- S - Custom Programmed, (13.56 MHz only)⁶, Prox configured. Specify Programming Information

Front Packaging (Select one option)

- G - Plain White with Gloss Finish
- C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number¹

Back Packaging (Select one option)

- G - Plain White with Gloss Finish²
- 1 - Plain White with Gloss Finish with Magnetic Stripe²
- C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number^{1, 2}
- 3 - Custom Artwork with Gloss Finish with Magnetic Stripe - Specify Custom Artwork Number^{1, 2}

13.56 MHz MIFARE Card Numbering³ (Select one option)

- M - Sequential Matching Encoded/Printed (Inkjetted)⁵
- N - No Printed Card Numbering
- U - UID (CSN) HEX card numbering only (Inkjetted)⁵
- V - UID (CSN) Decimal card numbering only (Inkjetted)⁵
- S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)⁵
- R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)⁵
- A - Sequential Matching Encoded/Printed (Laser Engraved)⁴
- B - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)⁴
- C - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)⁴
- Z - Reversed UID (CSN) Decimal card numbering only (Laser Engraved)⁴

Slot Punch (Select one option)

- N - No slot punch. This card can be slotted vertically, Printed Vertical Slot Indicators
- V - Vertical Slot Punch

125 kHz Proximity Card Numbering³ (Select one option)


- M - Sequential Matching Encoded/Printed (Inkjetted)
- N - No Printed Card Numbering
- S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)
- R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)
- A - Sequential Matching Encoded/Printed (Engraved)⁴
- B - Sequential Encoded/Sequential Non-Matching Printed (Engraved)⁴
- C - Random Encoded/Non-Matching Sequential Printed (Engraved)⁴

Option - Custom Artwork¹

- _____ (Specify Artwork Number - Refer to the Custom Artwork forms for new artwork)

Enter your final card options from check boxes above. Example: 3506PGGMNS

Final Part Number						N			-	(Options #)
-------------------	--	--	--	--	--	---	--	--	---	-------------

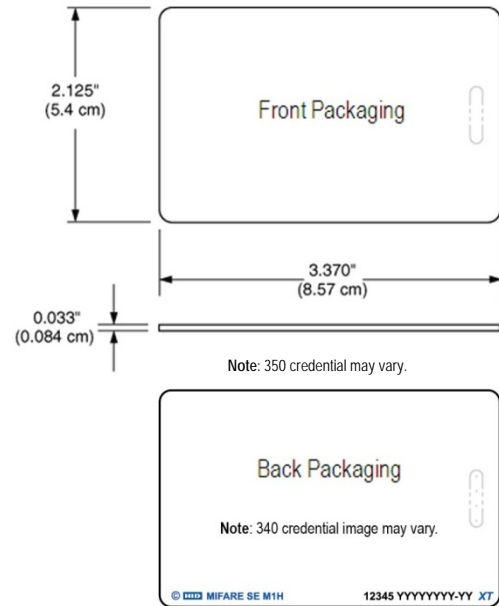

13.56 MHz Card Programming Information