iCLASS Seos + Prox Card - 510

Migration solution from proximity to high security for support in iCLASS SE platform. All iCLASS Seos 8K cards are OTP enabled.
Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.

Base Model	☐ *510 Composite 40% Polyester / PVC**

iCLASS Seos Memory Size and Allocation (Select one option)
☐ **5** - 16K Bytes
☐ **6** - 8K Bytes[6]

Programming (Select one option)
☐ **P** - Programmed with Security Identity Object (SIO), Prox non programmed
☐ **R** - Both interfaces programmed: iCLASS Seos with Security Identity Object (SIO), Prox programmed with HID format
☐ **V** - Unprogrammed, for use with iCLASS SE Encoder

Front Packaging (Select one option)
☐ **G** - Plain White with Gloss Finish
☐ **C** - Custom Artwork with Gloss Finish - Specify Custom Artwork Number[1]

Back Packaging (Select one option)
☐ **G** - Plain White with Gloss Finish[2]
☐ **C** - Custom Artwork with Gloss Finish - Specify Custom Artwork Number[1]
☐ **1** - Plain White with Gloss Finish with Magnetic Stripe[2]
☐ **3** - Custom Artwork with Gloss Finish with Magnetic Stripe - Specify Custom Artwork Number[1]

iCLASS Seos Card Numbering[3] (Select one option)
☐ **M** - Sequential Matching Encoded/Printed (Inkjetted)[5]
☐ **N** - No Printed Card Numbering
☐ **S** - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)[5]
☐ **R** - Random Encoded/Non-Matching Sequential Printed (Inkjetted)[5]
☐ **A** - Sequential Matching Encoded/Printed (Laser Engraved)
☐ **B** - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)
☐ **C** - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)

Slot Punch[4]
☒ **N** - No Slot Punch

125 kHz Card Numbering[3] (Select one option
☐ **M** - Sequential Matching Encoded/Printed (Inkjetted)[5]
☐ **N** - No Printed Card Numbering
☐ **S** - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)[5]
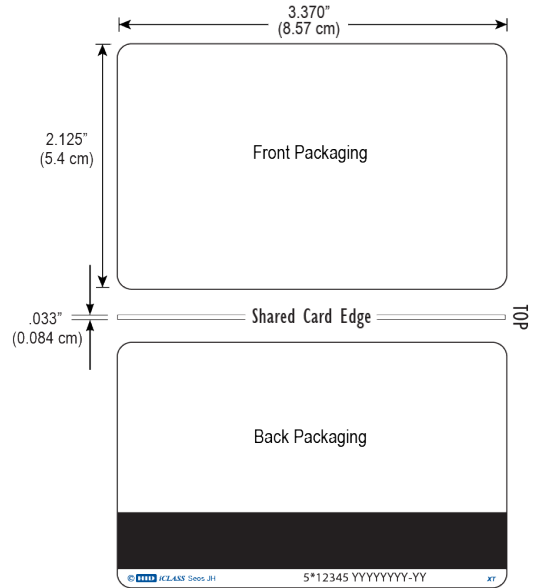☐ **R** - Random Encoded/Non-Matching Sequential Printed (Inkjetted)[5]
☐ **A** - Sequential Matching Encoded/Printed (Laser Engraved)
☐ **B** - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)
☐ **C** - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)

Option - Custom Artwork[1]
☐ _____ (Specify Artwork Number - Refer to the Custom Artwork Forms for new artwork)

Enter your final card options from check boxes above. Example: 5105PGGNNN

Final Part Number	510					**N**		**-**	**(Options #)**

3.370" (8.57 cm)
2.125" (5.4 cm)
Front Packaging
.033" (0.084 cm)
Shared Card Edge — TOP
Back Packaging
© HID iCLASS Seos JH   5*12345 YYYYYYYY-YY   XT

Y = Seos Programming
12345 = Card ID Number
YYYYYYYY-YY = Sales Order Number

iCLASS Seos Card Programming Information

Format Number _____ (example: H10301)   Bit Numbers _____ (example: 26 bit) Facility Code _____
Encoded Card # Start _____   Stop _____   Printed Card # Start _____   Stop _____
HID Elite ICE Number (if applicable) - _____ (Custom Format) Site Code _____ City Code _____ OEM Code _____
Special Instructions: _____

125 kHz Card Programming Information

Format Number _____ (example: H10301)   Bit Numbers _____ (example: 26 bit) Facility Code _____
Encoded Card # Start _____   Stop _____   Printed Card # Start _____   Stop _____
HID Elite ICE Number (if applicable) - _____ (Custom Format) Site Code _____ City Code _____ OEM Code _____
Special Instructions: _____

[1] For new artwork files, contact Customer Service for custom artwork number, lead-times, and cost.
[2] Cards ordered with plain white front and back packaging, or custom artwork, will still have a small HID logo **HID** and reference number printed in the lower left-hand corner.
[3] The Printed card number is placed in the bottom right-hand corner on the back of the card.
[4] Cards are not available with any slot punch option.
[5] Please note that cards shipped within North America are always laser-engraved. Inkjetted option is not available for these cards.
[6] Available with 7 byte static UID for ISO14443A UID migration and interoperability. This feature reduces privacy and is not recommended. Contact your local sales or pre-sales representative for details.
* The composite construction is recommended for all cards with over-laminate applied. Consult with the printer manufacturer prior to ordering.